

HBJD 警示灯 Warning lights

- 工作环境温度：-25℃~+55℃
Working environment temperature: -25℃~+55℃
- 空气相对湿度：≤98%
Relative humidity of air: ≤98%
- 海拔高度：≤2000m
Altitude: ≤2000m
- 耐振动性：50Hz，振幅约1.2mm
Vibration resistance: 50Hz, amplitude of about 1.2mm
- 连续工作时间：40000小时（LED灯常亮型）
Continuous working time: 40000 hours (LED light on continuously)
25000小时（LED灯闪亮型）
25000 hours (LED flashing type)
- 声压强度：约75dB（正向1m处）85dB（正向10cm处），可定制85dB（正向1m处）
Sound pressure intensity: approximately 75dB (at 1m in the forward direction) 85dB (at 10cm in the forward direction), customizable 85dB (at 1m in the forward direction)
- 污染等级：3级
Pollution level: Level 3
- 产品认证：CCC CE
Product certification: CCC CE



HBJD-40A系列型号说明 HBJD-40A Series Model Description

HBJD-40A/□■/△/▲/●/※


对应符号 Symbol	符号名称 Symbol name	具体说明 Specify
□	发光发声方式 Luminous sound generation method	D:常亮闪亮同体带灯 / DB:常亮闪亮同体带灯+长鸣间断同体蜂鸣 / B:长鸣间断同体蜂鸣 D: Constant flashing same body with light / DB: Constant flashing same body with light+Long beep intermittent same body buzzing / B: Long beep intermittent same body buzzing
■	层数 Number of layers	1:单层 / 2:两层 / 3:三层 / 5:五层 1: Single layer / 2: Two layers / 3: Three layers / 5: Five layers
△	颜色 Color	R:红 / G:绿 / Y:黄 / B:蓝 / W:白 多层次警示灯颜色按由上往下的顺序标明 R: Red / G: green / Y: yellow / B: blue / W: white The colors of the multi-level warning lights are indicated in order from top to bottom
▲	使用电压 Use voltage	24V(允许电压波动24V~220VAC/DC) / 12VDC可订制 24V (allowable voltage fluctuation 24V~220V AC/DC) / 12VDC can be customized
●	安装方式 Installation method	A:标准型 / B:底座安装 / C:螺母侧安装 / D:折叠底座安装(带杆) / E:折叠底座安装 A: Standard Type/B: Base Installation / C: Nut Side Installation / D: Folding Base Installation (with Rod) / E: Folding Base Installation
※	防护等级 Protection grade	无字母代表不防水 / P:IP65(无蜂鸣标准安装产品可定制) No letters represent non waterproof / P: IP65 (no buzzing standard installation products can be customized)

HBJD-40系列型号说明 HBJD-40 Series Model Description


HBJD-40/□■/△/▲/●/※

对应符号 Symbol	符号名称 Symbol name	具体说明 Specify
□	发光发声方式 Luminous sound generation method	D:常亮型 / DZA:常亮连续发声 / DWA:常亮间断发声 D: Constant light type / DZA: Constant light continuous sound / DWA: Constant light intermittent sound
■	层数 Number of layers	1:单层 / 2:两层 / 3:三层 / 5:五层 1: Single layer / 2: Two layers / 3: Three layers / 5: Five layers
△	颜色 color	R:红 / G:绿 / Y:黄 / B:蓝 / W:白 多层次警示灯颜色按由上往下的顺序标明 R: Red / G: green / Y: yellow / B: blue / W: white The colors of the multi-level warning lights are indicated in order from top to bottom
▲	使用电压 Use voltage	24VAC/DC / 220VAC
●	安装方式 Installation method	A:标准型 / B:底座安装 / C:螺母侧安装 / D:折叠底座安装(带杆) / E:折叠底座安装 A: Standard Type/B: Base Installation / C: Nut Side Installation / D: Folding Base Installation (with Rod) / E: Folding Base Installation
※	防护等级 Protection grade	无字母代表不防水 / P:IP65(无蜂鸣标准安装产品可定制) No letters represent non waterproof / P: IP65 (no buzzing standard installation products can be customized)


接线图 Wiring diagram

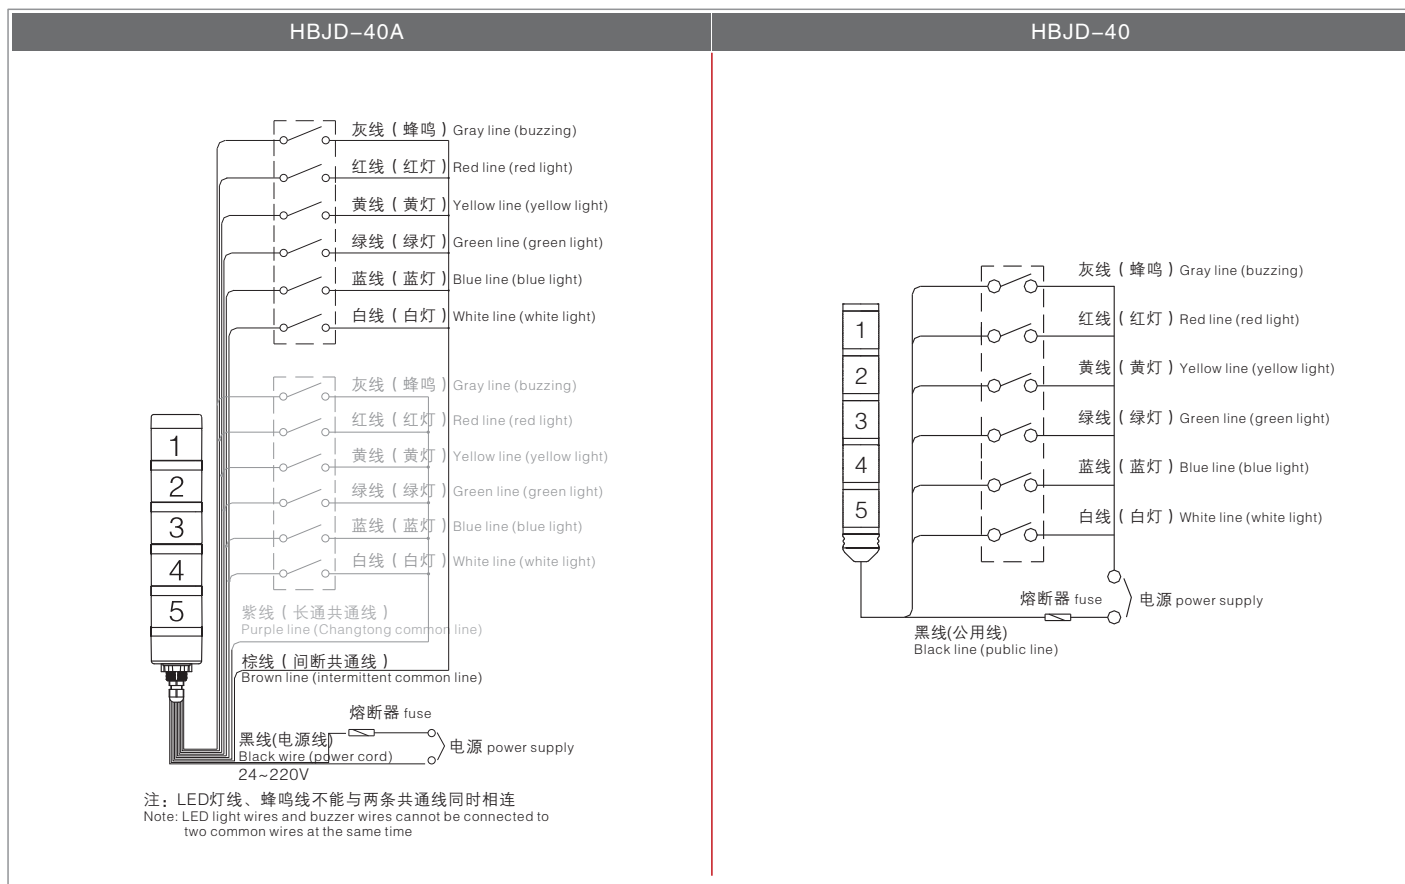


安装示意图 Installation diagram

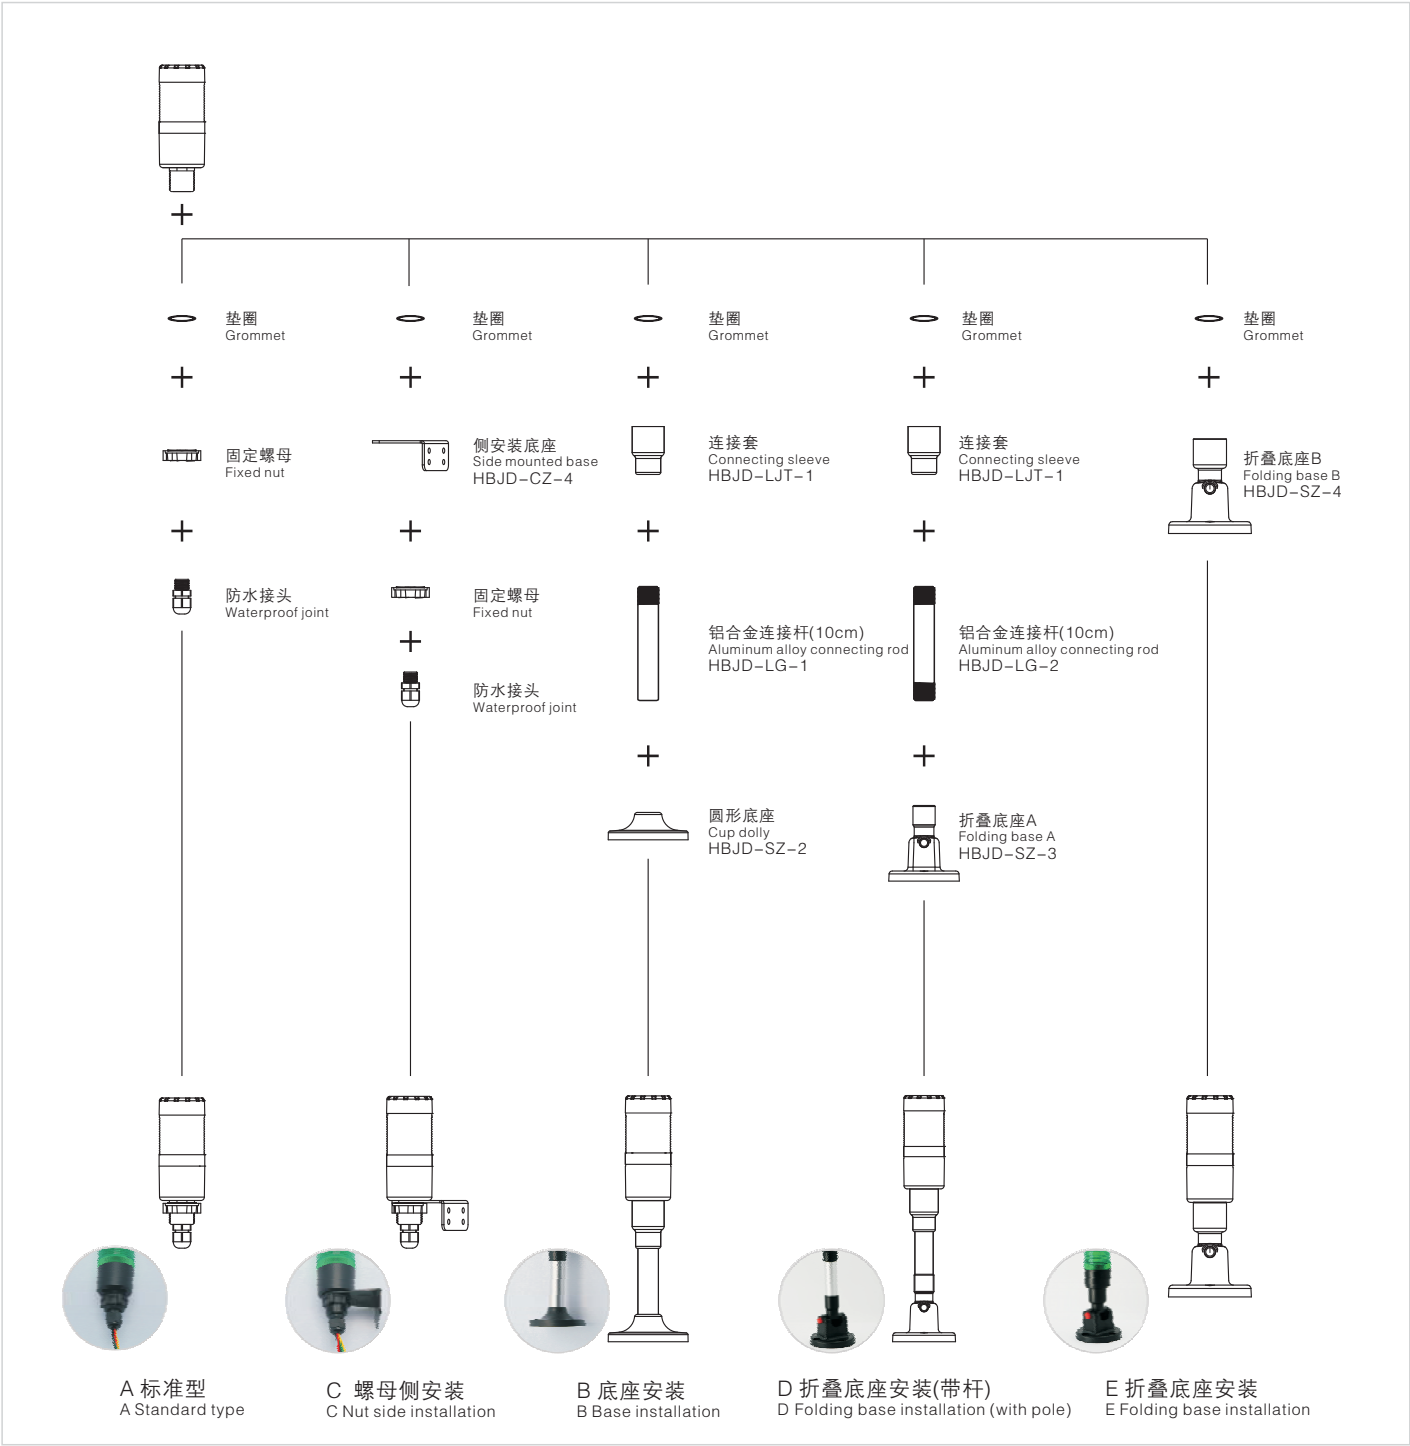


安装开孔尺寸 Installation hole size

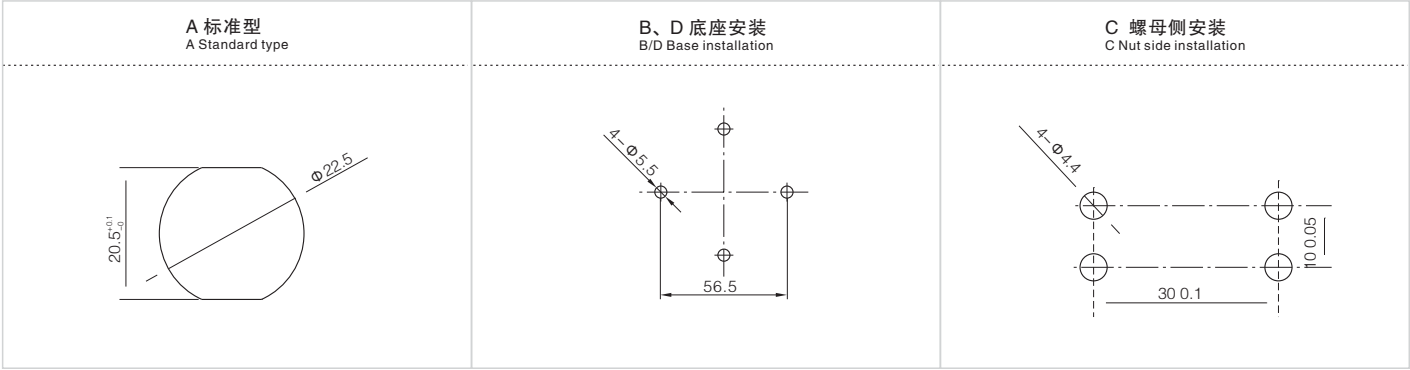


HBJD-40产品图例
HBJD-40 Product Legend

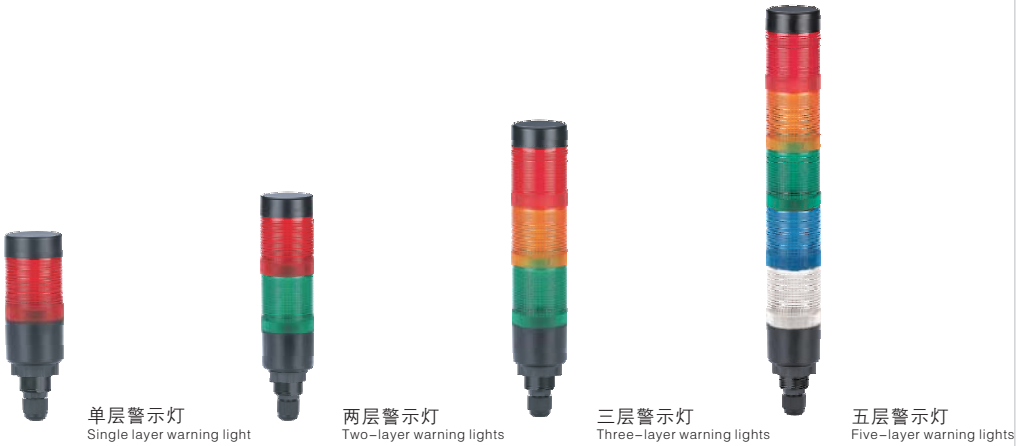


HBJD-40A产品图例
HBJD-40A Product Legend

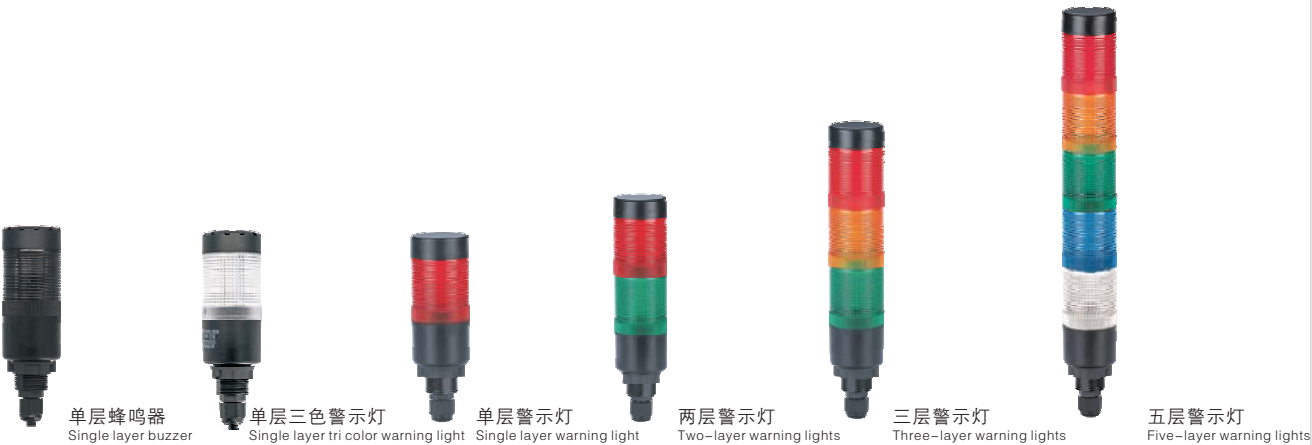


外型尺寸图
Outline dimension diagram

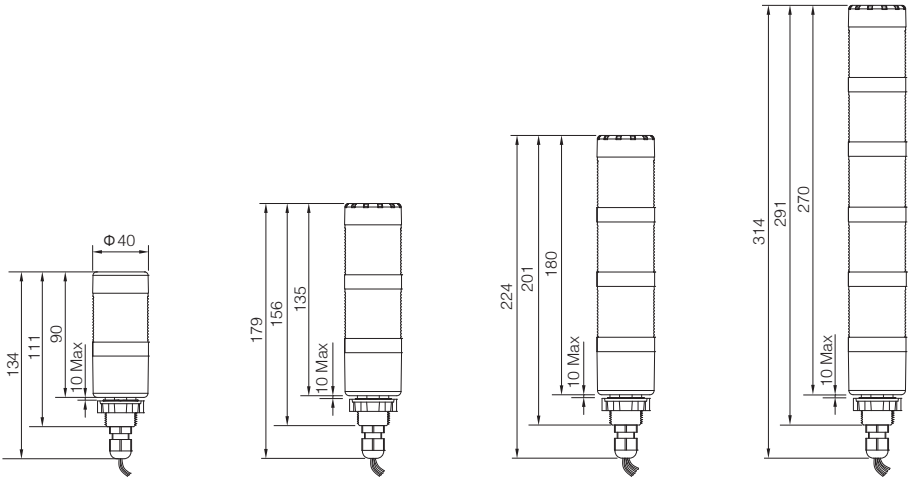


竖直安装座
Vertical installation seat
HBJD-SZ-2

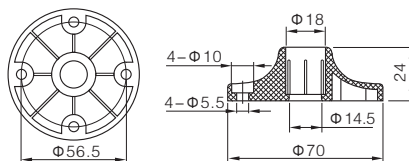


侧安装座
Side mounting seat
HBJD-CZ-4

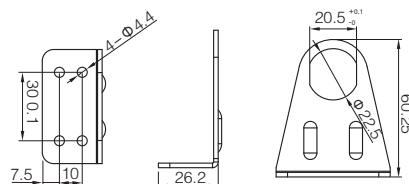

连接套
Connecting sleeve
HBJD-LJT-1




铝合金连接杆(10cm)
Aluminum alloy connecting rod (10cm)
HBJD-LG-1




铝合金连接杆(10cm)
Aluminum alloy connecting rod (10cm)
HBJD-LG-2



折叠安装座A
Folding installation seat A
HBJD-SZ-3

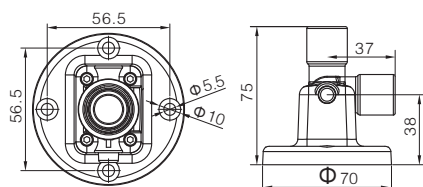

折叠安装座B
Folding installation seat B
HBJD-SZ-4

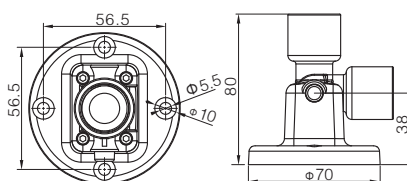


HBJD-55A系列型号说明 HBJD-55A Series Model Description

对应符号 Symbol	符号名称 Symbol name	具体说明 Specify
□	发光发声方式 Luminous sound generation method	D:常亮闪亮同体带灯 / DB:常亮闪亮同体带灯+长鸣间断同体蜂鸣 / B:长鸣间断同体蜂鸣 D: Constant flashing same body with light / DB: Constant flashing same body with light+Long beep intermittent same body buzzing / B: Long beep intermittent same body buzzing
■	层数 Number of layers	1:单层 / 2:两层 / 3:三层 / 5:五层 1: Single layer / 2: Two layers / 3: Three layers / 5: Five layers
△	颜色 Color	R:红 / G:绿 / Y:黄 / B:蓝 / W:白 多层次警示灯颜色按由上往下的顺序标明 R: Red / G: green / Y: yellow / B: blue / W: white The colors of the multi-level warning lights are indicated in order from top to bottom
▲	使用电压 Use voltage	24V(允许电压波动24V~220VAC/DC) / 12VDC可订制 24V (allowable voltage fluctuation 24V~220V AC/DC) / 12VDC can be customized
●	安装方式 Installation method	A:标准型 / B:底座安装 / C:螺母侧安装 / D:折叠底座安装(带杆) / E:折叠底座安装 A: Standard Type/B: Base Installation / C: Nut Side Installation / D: Folding Base Installation (with Rod) / E: Folding Base Installation
※	防护等级 Protection grade	无字母代表不防水 / P:IP65(无蜂鸣标准安装产品可定制) No letters represent non waterproof / P: IP65 (no buzzing standard installation products can be customized)


HBJD-55系列型号说明 HBJD-40 Series Model Description

对应符号 Symbol	符号名称 Symbol name	具体说明 Specify
□	发光发声方式 Luminous sound generation method	D:常亮型 / DZA:常亮连续发声 / DWA:常亮间断发声 D: Constant light type / DZA: Constant light continuous sound / DWA: Constant light intermittent sound
■	层数 Number of layers	1:单层 / 2:两层 / 3:三层 / 5:五层 1: Single layer / 2: Two layers / 3: Three layers / 5: Five layers
△	颜色 color	R:红 / G:绿 / Y:黄 / B:蓝 / W:白 多层次警示灯颜色按由上往下的顺序标明 R: Red / G: green / Y: yellow / B: blue / W: white The colors of the multi-level warning lights are indicated in order from top to bottom
▲	使用电压 Use voltage	24VAC/DC / 220VAC
●	安装方式 Installation method	A:标准型 / B:底座安装 / C:螺母侧安装 / D:折叠底座安装(带杆) / E:折叠底座安装 A: Standard Type/B: Base Installation / C: Nut Side Installation / D: Folding Base Installation (with Rod) / E: Folding Base Installation
※	防护等级 Protection grade	无字母代表不防水 / P:IP65(无蜂鸣标准安装产品可定制) No letters represent non waterproof / P: IP65 (no buzzing standard installation products can be customized)


接线图 Wiring diagram

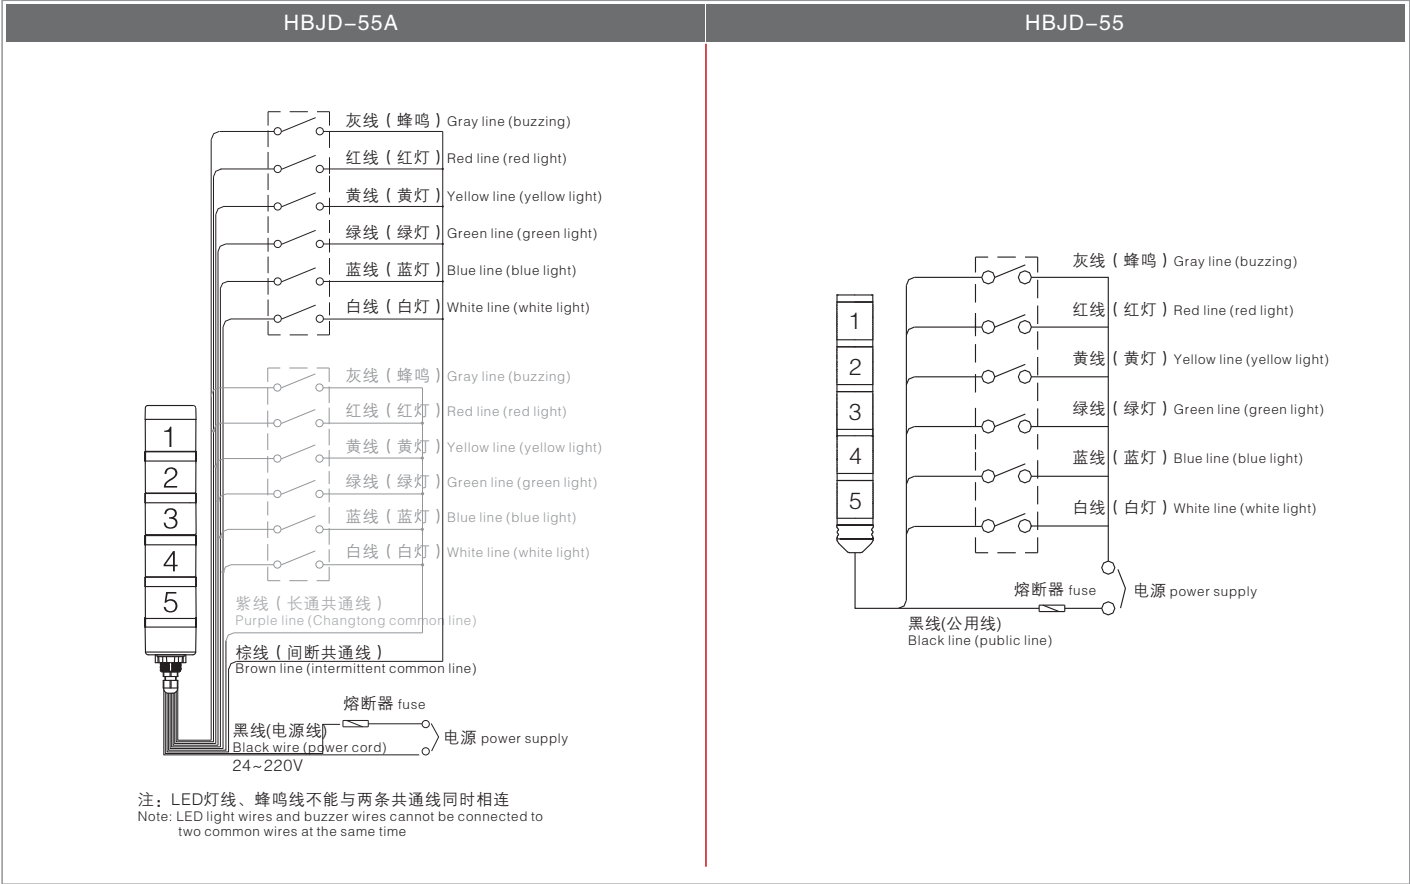


安装示意图 Installation diagram

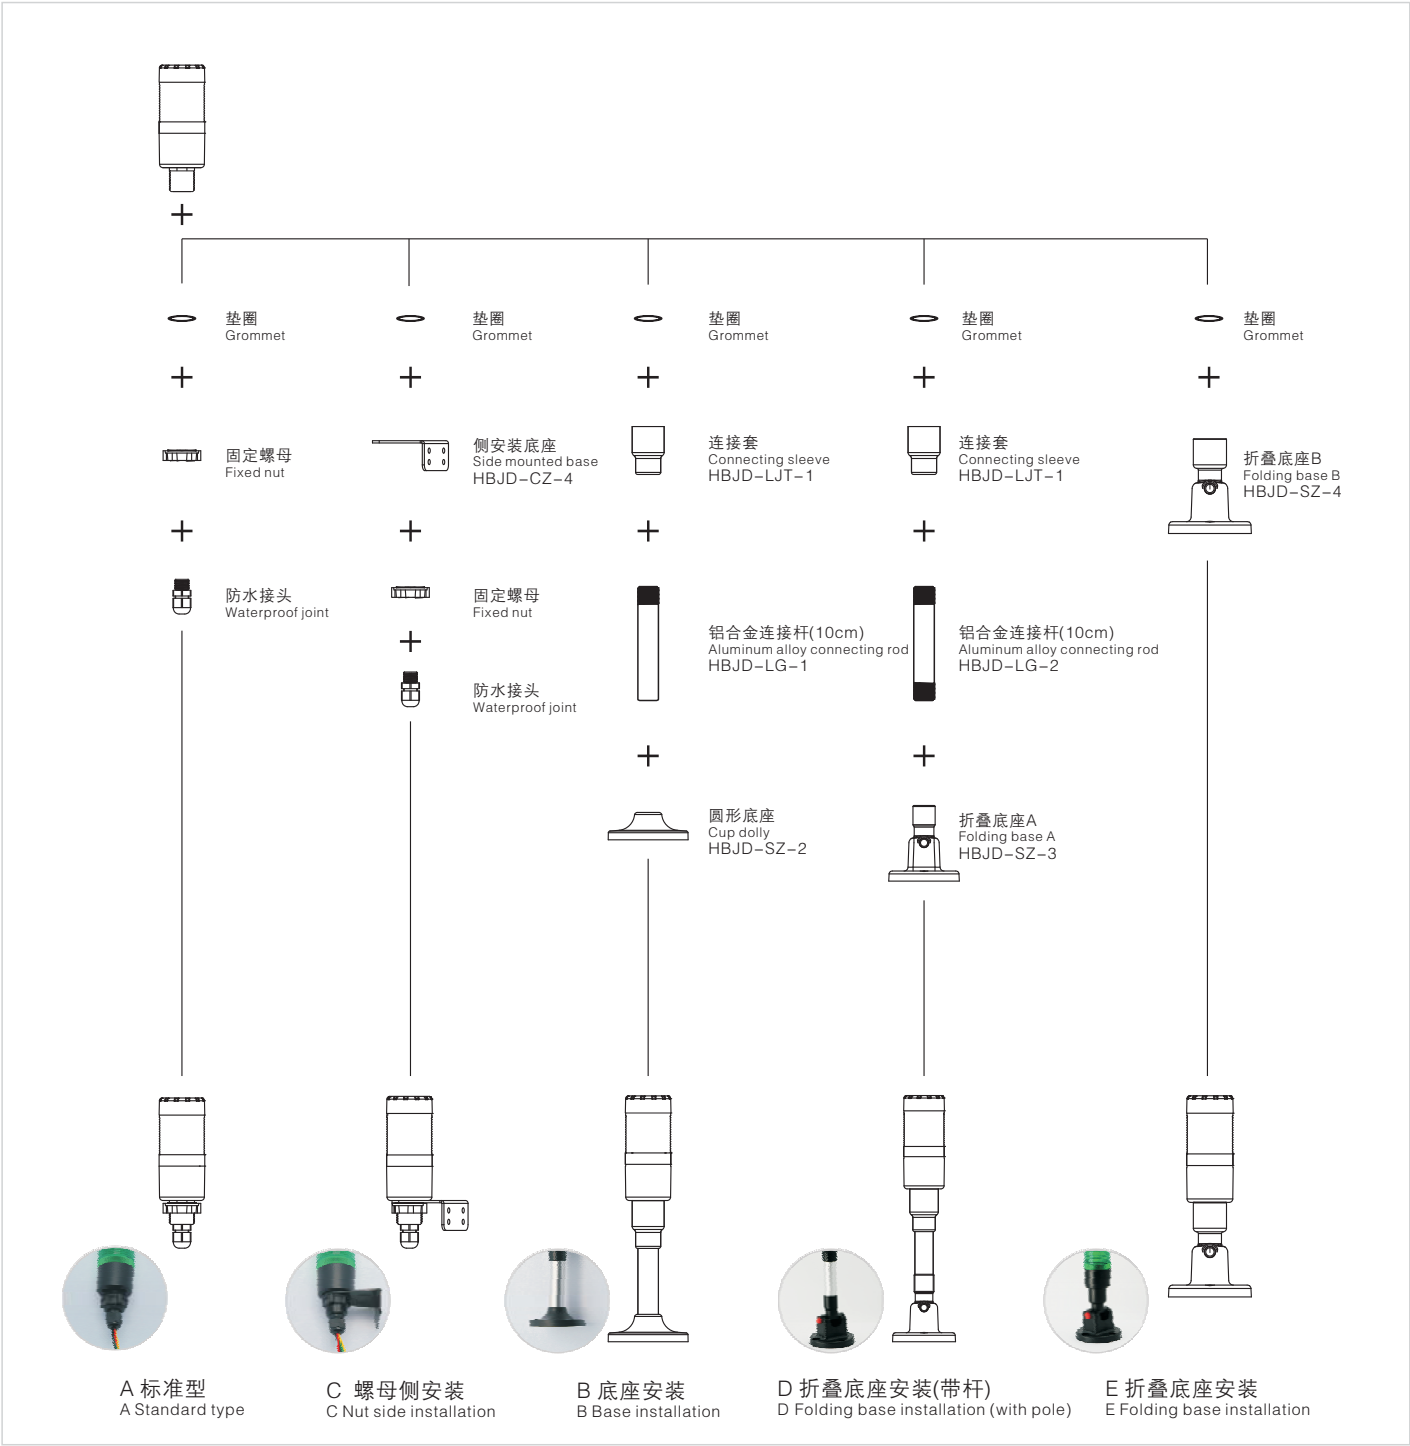

安装开孔尺寸 Installation hole size

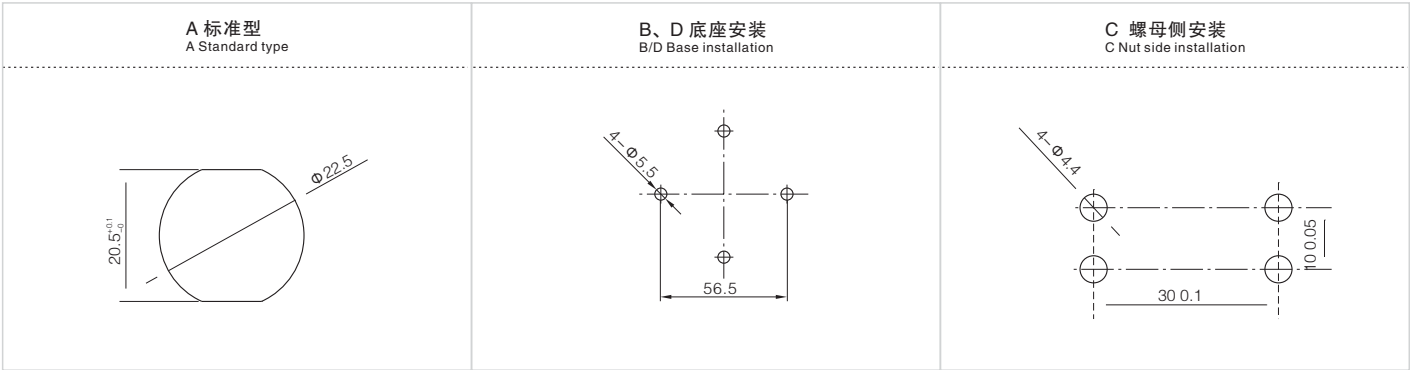


HBJD-55产品图例
HBJD-55 Product Legend

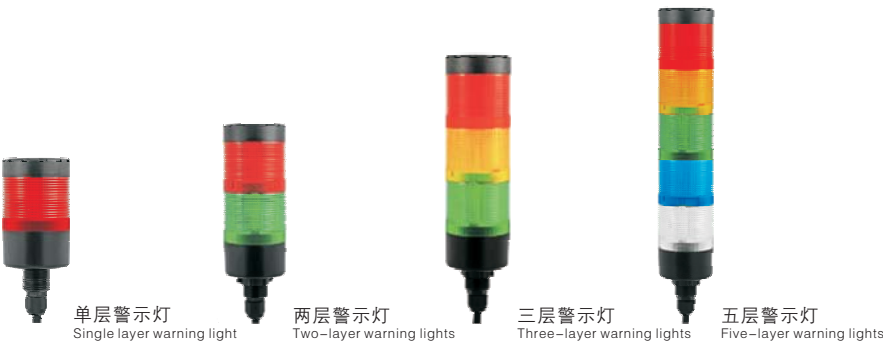


HBJD-55A产品图例
HBJD-55A Product Legend




外型尺寸图
Outline dimension diagram

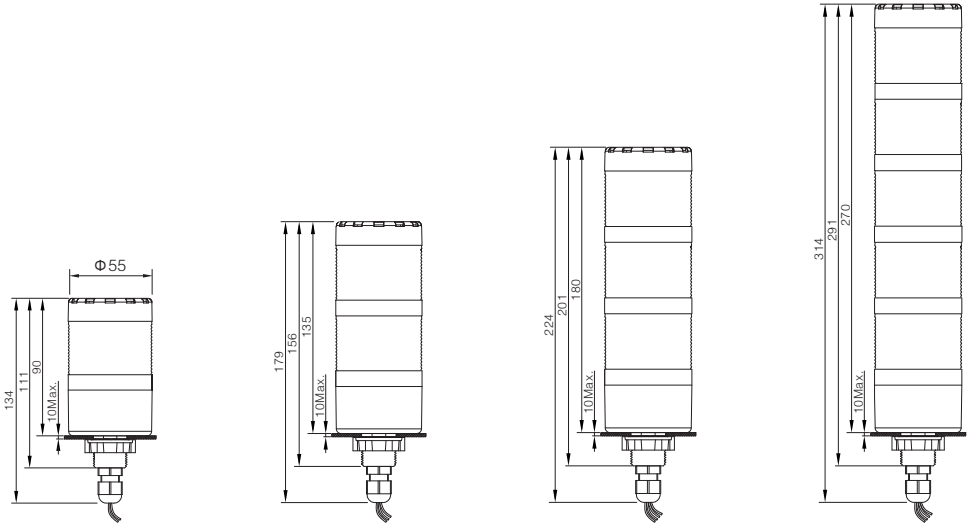


竖直安装座
Vertical installation seat
HBJD-SZ-2

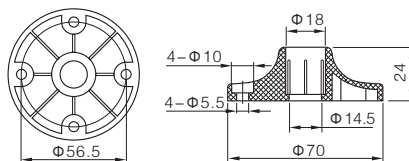


侧安装座
Side mounting seat
HBJD-CZ-4

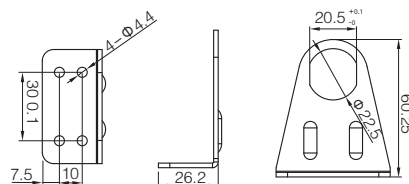

连接套
Connecting sleeve
HBJD-LJT-1




铝合金连接杆(10cm)
Aluminum alloy connecting rod (10cm)
HBJD-LG-1



铝合金连接杆(10cm)
Aluminum alloy connecting rod (10cm)
HBJD-LG-2



折叠安装座A
Folding installation seat A
HBJD-SZ-3

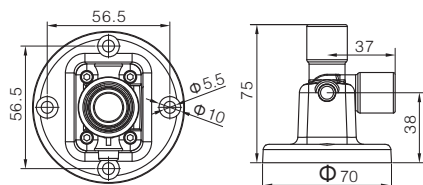

折叠安装座B
Folding installation seat B
HBJD-SZ-4

